



HYDRAULIC THREADED CARTRIDGE VALVES

North American Regional Product Selection Guide

HVS Guide MSG15-4000





WARNING - USER RESPONSIBILITY

FAILURE OR IMPROPER SELECTION OR IMPROPER USE OF THE PRODUCTS DESCRIBED HEREIN OR RELATED ITEMS CAN CAUSE DEATH, PERSONAL INJURY AND PROPERTY DAMAGE.

This document and other information from Parker-Hannifin Corporation, its subsidiaries and authorized distributors provide product or system options for further investigation by users having technical expertise.

The user, through its own analysis and testing, is solely responsible for making the final selection of the system and components and assuring that all performance, endurance, maintenance, safety and warning requirements of the application are met. The user must analyze all aspects of the application, follow applicable industry standards, and follow the information concerning the product in the current product catalog and in any other materials provided from Parker or its subsidiaries or authorized distributors.

To the extent that Parker or its subsidiaries or authorized distributors provide component or system options based upon data or specifications provided by the user, the user is responsible for determining that such data and specifications are suitable and sufficient for all applications and reasonably foreseeable uses of the components or systems.

OFFER OF SALE

The items described in this document are hereby offered for sale by Parker-Hannifin Corporation, its subsidiaries or its authorized distributor. This offer and its acceptance are governed by the provisions stated in the detailed "Offer of Sale" Available from your local Parker representative.

Check Valves	
• <i>Insert Type, Ball Type and Poppet Type</i>	1-2
• <i>Pilot Operated and Dual Pilot Piston</i>	3-4
Shuttle Valves	
• <i>Insert Type and Cartridge Type (Ball)</i>	5
• <i>In-Line and Cartridge Type (Spool)</i>	6
Load & Motor Control Valves	
• <i>Standard Pilot Assist</i>	7-8
• <i>Independent of Back-Pressure, Vented to Atmosphere</i>	9
Flow Control Valves	
• <i>Needle Valves</i>	10
• <i>Pressure Compensated Flow Controls, Flow Regulators, Priority Flow</i>	11-12
• <i>Flow Dividers/Combiners</i>	13
Pressure Control Valves	
• <i>Relief Valves - Direct Acting, Differential Area, Pilot Operated, Crossover</i>	14-16
• <i>Unloading Valves</i>	16
• <i>Sequence Valves - Pilot Operated (Internal Pilot & External Pilot), Direct Acting</i>	17-18
• <i>Reducing Valves - Pilot Operated</i>	18
• <i>Reducing/Relieving - Direct Acting and Pilot Operated</i>	19
Logic Element Valves	
• <i>Poppet Type</i>	20
• <i>Spool Type - Normally Closed and Normally Open</i>	21-25
Directional Control Valves	
• <i>3-way, External Pilot, Closed Transition</i>	26
• <i>3-way, 2-position, External Pilot and Drain, Open Transition</i>	26
Manual Valves	
• <i>Poppet Type, Pull to Open, Normally Closed</i>	27
• <i>Spool Type, Rotary and Directional Control</i>	27-28
Solenoid Valves	
• <i>Poppet Type, 2-way</i>	29-31
• <i>Spool Type (2-way, 3-way, 4-way)</i>	32-38
Proportional Valves	
• <i>Pressure Control Valves (Relieving and Reducing)</i>	39-40
• <i>Flow Control Valves (2-way (Poppet), 2-way, 3-way)</i>	41-44
• <i>Directional Control Valves</i>	45-46
Coils	
• <i>Super Coil (1/2", 5/8")</i>	47
• <i>Super Coil (1/2" Short - EPR083R)</i>	48
• <i>DS Coil (1")</i>	48
Bodies	
• <i>Standard Line Bodies (B**-*)</i>	49
• <i>Counterbalance Bodies (MHC-*)</i>	49
• <i>Special Line Bodies (LB10*)</i>	50
• <i>Cartpak Bodies (BD03*)</i>	51

If you have questions about the products contained in this catalog, or their applications, please contact:

Hydraulic Valve Systems Division

phone: 1-440-366-5100


email: HCS.Support@support.parker.com

Extra care is taken in the preparation of this literature, but Parker is not responsible for any inadvertent typographical errors or omissions. Information in this catalog is only accurate as of the date of publication. For a more current information base, please consult the division web site at www.parker.com/hvs

Check Valves

INSERT TYPE (CVH021 series)

(For more information, see details page [linked here](#))


CVH

Check
Valve

021

Size

Size	
Code	Size
021	1 GPM, 5000 PSI

Highlight represents Global Core product. More detailed information is available in the Global Core Catalog, MSG15-3504, available online at www.parker.com/hvs/resources

INSERT TYPE (D1* series)

(For more information, see details page [linked here](#))


D1A060

D1B125
D1

Check
Valve



Insert
Type



Size




-



Crack
Pressure



Seal
(Nitrile)



Highlight represents Global Core product. More detailed information is available in the Global Core Catalog, MSG15-3504, available online at www.parker.com/hvs/resources


Insert Type	
Code	Type
A	Ball
B	Poppet

Size	
Code	Cavity
060 ¹	2U (38 GPM, 6000 PSI)
125 ²	2C (132 GPM, 6000 PSI)
1 - Insert Type "A" only 2 - Insert Type "B" only	

Crack Pressure	
Code	Pressure
0.2	3 PSI
1.0 ¹	15 PSI
5.0 ¹	72 PSI
1 - Size "125" only	

BALL TYPE (D0 series)

(For more information, see details page [linked here](#))


D0

Check
Valve



Size


B2

Ball
Type



-



Crack
Pressure



Seal
(Nitrile)

Highlight represents Global Core product. More detailed information is available in the Global Core Catalog, MSG15-3504, available online at www.parker.com/hvs/resources


Size	
Code	Cavity
2	C08-2 (21 GPM, 6000 PSI)
4	C10-2 (42 GPM, 6000 PSI)

Crack Pressure	
Code	Pressure
0.2	3 PSI
1.0 ¹	15 PSI
2.1	30 PSI
3.4 ¹	50 PSI
6.0 ¹	87 PSI
1 - Size "2" only	

Check Valves

POPPET TYPE (CVH series)

(For more information, see details page [linked here](#))



Highlight represents Global Core product. More detailed information is available in the Global Core Catalog, MSG15-3504, available online at www.parker.com/hvs/resources

CVH

Check
Valve

Size

P

Poppet
Type

Crack
Pressure

Seal


Size	
Code	Cavity
081	C08-2 (10 GPM, 5000 PSI)
103	C10-2 (16 GPM, 5000 PSI)
121	C12-2 (32 GPM, 5000 PSI)
161	C16-2 (60 GPM, 5000 PSI)
201	C20-2 (80 GPM, 5000 PSI)

Seal	
Code	Material
Omit ¹	"D"-Ring, Nitrile
N ²	Nitrile
V	Fluorocarbon
1 - Size 081, 103 - "D"-Ring Size 121, 161, 201 - Nitrile 2 - Size 081, 103 only	
"D"-Ring for C08 and C10 cavity sizes only!	

Crack Pressure		
Size	Code	Crack Pressure
081	Omit	5 PSI
	10	10 PSI
	30	30 PSI
	65	65 PSI
	100	100 PSI
	150	150 PSI
103	Omit	5 PSI
	20	20 PSI
	50	50 PSI
	65	65 PSI
	80	80 PSI
	100	100 PSI
121	Omit	25 PSI
	65	65 PSI
161	Omit	5 PSI
	20	20 PSI
	65	65 PSI
	125	125 PSI
	175	175 PSI
201	Omit	5 PSI
	20	20 PSI
	65	65 PSI

POPPET TYPE (D06B2P series)

(For more information, see details page [linked here](#))



D0

Check
Valve

6

Size

B2P

Poppet
Type

0.1

Crack
Pressure

N

Seal
(Nitrile)

Size	
Code	Cavity
6	C16-2 (132 GPM, 6000 PSI)


Crack Pressure	
Code	Pressure
0.1	1.5 PSI

Highlight represents Global Core product. More detailed information is available in the Global Core Catalog, MSG15-3504, available online at www.parker.com/hvs/resources

Check Valves

PILOT OPERATED (*CP series*)

(For more information, see details page [linked here](#))



P.O.
Check
Valve



Pressure



Size



Poppet
Type



Crack
Pressure



Seal

Pressure	
Code	Rating
Omit ¹	3000 PSI
H ²	5000 PSI
1 - 084 size only 2 - 104 and 124 size only	

Size	
Code	Cavity
084	C08-3 (5 GPM)
104	C10-3 (8 GPM)
124	C12-3 (20 GPM)


Crack Pressure		
Size	Code	Crack Pressure
084	Omit	25 PSI
	85	85 PSI
104	15	15 PSI
	Omit	20 PSI
	50	50 PSI
124	Omit	25 PSI

Seal	
Code	Material
Omit ¹	"D"-Ring, Nitrile
N ²	Nitrile
V	Fluorocarbon
1 - Size 084, 124 - Nitrile Size 104 - "D"-Ring 2 - Size 104 only	
"D"-Ring for C10 cavity sizes only!	

Highlight represents Global Core product More detailed information is available in the Global Core Catalog, MSG15-3504, available online at www.parker.com/hvs/resources

DUAL PILOT OPERATED (*CPD series*)

(For more information, see details page [linked here](#))



Cartridge
Dual
P.O. Check



Size



Seal

Size	
Code	Cavity
084P	C10-2 (16 GPM, 5000 PSI)


Seal	
Code	Material
Omit	Nitrile
V	Fluorocarbon

Highlight represents Global Core product More detailed information is available in the Global Core Catalog, MSG15-3504, available online at www.parker.com/hvs/resources

Check Valves

DUAL PILOT PISTON (CDPH series)

(For more information, see details page [linked here](#))



Highlight represents Global Core product. More detailed information is available in the Global Core Catalog, MSG15-3504, available online at www.parker.com/hvs/resources

Crack Pressure	
Code	Pressure
Omit ¹	5 PSI
20	20 PSI
50	50 PSI
65	65 PSI
80	80 PSI
100	100 PSI
1 - Not available with "A" piston option	

CDPH

Dual Pilot
Piston
P.O. Check



Size



Piston
Type



Crack
Pressure



Seal



Port
Size

Size	
Code	Cavity
103	C10-2 (16 GPM, 5000 PSI)

Piston Type	
Code	Type
P	Pilot Piston w/o seal
A ¹	Pilot Piston w/seal
1 - Requires 20 PSI minimum crack pressure	


Seal	
Code	Material
Omit	"D"-Ring
N	Nitrile
V	Fluorocarbon

Port Size	
Code	Size (Material)
8T	SAE-8 (Steel)

Shuttle Valves

INSERT TYPE (*KSWA3 series*)

(For more information, see details page [linked here](#))



KSWA3

Insert Shuttle
Valve, Ball Type

N


Seal
(Nitrile)

Highlight represents Global Core product. More detailed information is available in the Global Core Catalog, MSG15-3504, available online at www.parker.com/hvs/resources

Size	
Code	Cavity
KSWA3	CAVSW-3 (2.5 GPM, 6000 PSI)

CARTRIDGE TYPE, BALL (*CSH series*)

(For more information, see details page [linked here](#))



CSH

Shuttle
Valve



Size



Seal

Highlight represents Global Core product. More detailed information is available in the Global Core Catalog, MSG15-3504, available online at www.parker.com/hvs/resources

Size	
Code	Cavity
041	C04-3 (1 GPM, 5000 PSI)
101B	C10-3 (10 GPM, 5000 PSI)

Seal	
Code	Material
Omit ¹	"D"-Ring, Nitrile
N ²	Nitrile
V	Fluorocarbon
¹ - Size 041 - Nitrile Size 101B - "D"-Ring ² - Size 101B only	
"D"-Ring for C10 cavity size only!	


Shuttle Valves

IN-LINE (ASH series)

(For more information, see details page [linked here](#))



ASH-04



ASH

Check
Valve

-

Port
Size

-

Port
Type

Port Size	
Code	Size
04	1/4" JIC (3 GPM, 3000 PSI)
06	SAE-6 (6 GPM, 3000 PSI)


Port Type	
Code	Type
2	SAE (Size 06 only)
03	Male JIC (Size 04 only)



ASH-06

CARTRIDGE TYPE, SPOOL (K04C3 series)

(For more information, see details page [linked here](#))



K

Shuttle
Valve

04

Size

C3

3-way,
Spring
Center

-

10.0

Switch
Pressure

N

Seal
(Nitrile)

Size	
Code	Cavity
04	C10-4 (26 GPM, 6000 PSI)

Switching Pressure	
Code	Pressure
10.0	145 PSI

Highlight represents Global Core product. More detailed information is available in the Global Core Catalog, MSG15-3504, available online at www.parker.com/hvs/resources

Load/Motor Control Valves

7

STANDARD PILOT ASSISTED (*E2*1 series*)

(For more information, see details page [linked here](#))



Load
Control
Valve


Pilot
Ratio

Size

Function

Adjustment
Style

Seal



Pilot Ratio	
Code	Ratio
E'	1.5:1
K	3:1
M	4.5:1

1 - Function Code Omit and S only

Size	
Code	Cavity
1	CAVT11A (16 GPM, 5000 PSI)

Adjustment Style	
Code	Style
Z	Screw Adjust
T	Tamperproof Cap

Function	
Code	Restrictive
Omit	Non-restrictive
S	Semi-restrictive
R	Restrictive

Seal	
Code	Material
N	Nitrile
V	Fluorocarbon

Highlight represents Global Core product. More detailed information is available in the Global Core Catalog, MSG15-3504, available online at www.parker.com/hvs/resources

STANDARD PILOT ASSISTED (*CB 101 series*)

(For more information, see details page [linked here](#))



Load
Control
Valve


Size

Pilot
Ratio

Adjustment
Style

Pressure
Range

Seal



Size	
Code	Cavity
101	C10-3 (12 GPM, 5500 PSI)

Pressure Range	
Code	Range
10	500 to 1500 PSI
20	1000 to 2500 PSI
30	2400 to 5000 PSI

Highlight represents Global Core product. More detailed information is available in the Global Core Catalog, MSG15-3504, available online at www.parker.com/hvs/resources

Pilot Ratio	
Code	Ratio
A	3:1
B	4.5:1
C	7:1

Adjustment Style	
Code	Style
S	Screw Adjust
T	Tamperproof Cap
K	Knob

Seal	
Code	Material
Omit	Nitrile
V	Fluorocarbon

Load/Motor Control Valves

8

STANDARD PILOT ASSISTED (MHC series)

(For more information, see details page [linked here](#))



MHC	-		-	S				-	
------------	---	--	---	----------	--	--	--	---	--

Load
Control
Valve

Size


Type

Pilot
Ratio

Adjustment
Style

Holding
Pressure

Seal



Size	
Code	Cavity
010	CDD-1010 (10 GPM, 5000 PSI)
022	CDD-1036 (25 GPM, 5000 PSI)

Adjustment Style	
Code	Style
S	Standard (adj.)
N	Shimmed (non-adj.)

Holding Pressure	
Code	Pressure
D ¹	1000 PSI
F ¹	2000 PSI
H	3000 PSI
K ²	5000 PSI
1 - Size 010 only 2 - Pilot Ratio F or J and Adjustment N only	

Highlight represents Global Core product. More detailed information is available in the Global Core Catalog, MSG15-3504, available online at www.parker.com/hvs/resources

Type	
Code	Function
S	Standard (non-vented)

Pilot Ratio	
Code	Ratio
B ¹	4:1
C ²	5:1
F ¹	7:1
J	10:1
1 - Size 010 only 2 - Size 022 only	

Seal	
Code	Material
00B	Nitrile
00F	Fluorocarbon

STANDARD PILOT ASSISTED (E2* series)

(For more information, see details page [linked here](#))



E2			Z	N	
-----------	--	--	----------	----------	--

Load
Control
Valve


Pilot
Ratio

Size

Adjustment
Style

Seal
(Nitrile)

Design
Code



Size	
Code	Cavity
020 ¹	53-1 (3.7 GPM, 6000 PSI) (5.3 GPM, 6000 PSI)
040	68-1 (15.9 GPM, 5000 PSI)
060	3C (32 GPM, 5000 PSI)
125	3M (53 GPM, 5000 PSI)
300	3K (92 GPM, 5000 PSI)
1 - pilot ratio A=3.7 GPM, pilot ratio B=5.3 GPM	

Adjustment Style	
Code	Style
Z	Screw Adjust

Design Code	
Code	Range
Omit	Size 020 only
MK2	Size 060, 125, 300 only
MK3	Size 040 only

Pilot Ratio		
Size	Code	Ratio
020	A	8:1
	B	4.5:1
040	A	8:1
	B	3:1
060	A	8:1
	B	3:1
	H	1.75:1
125	A	8:1
	E	3:1
300	A	8:1
	C	3:1

Highlight represents Global Core product. More detailed information is available in the Global Core Catalog, MSG15-3504, available online at www.parker.com/hvs/resources

Load/Motor Control Valves

9

VENTED, PILOT ASSISTED (*MHC series*)

(For more information, see details page [linked here](#))



Load
Control
Valve

Size


Type

Pilot
Ratio

Adjustment
Style

Holding
Pressure

Seal



Size	
Code	Cavity
010	CDD-1010 (10 GPM, 5000 PSI)
022	CDD-1036 (25 GPM, 5000 PSI)

Adjustment Style	
Code	Style
S	Standard (adj.)
N	Shimmed (non-adj.)

Holding Pressure	
Code	Pressure
D ¹	1000 PSI
F ¹	2000 PSI
H	3000 PSI
K ²	5000 PSI
1 - Size 010 only 2 - Pilot Ratio F or J and Adjustment N only	

Type	
Code	Function
V	Vented


Pilot Ratio	
Code	Ratio
B ¹	4:1
C ²	5:1
F ¹	7:1
J	10:1
1 - Size 010 only 2 - Size 022 only	

Seal	
Code	Material
00B	Nitrile
00F	Fluorocarbon

Highlight represents Global Core product. More detailed information is available in the Global Core Catalog, MSG15-3504, available online at www.parker.com/hvs/resources

VENTED, PILOT ASSISTED (*E6* series*)

(For more information, see details page [linked here](#))



E6

Load
Control
Valve

Pilot
Ratio

Size

Z

Adjustment
Style

N

Seal
(Nitrile)

Design
Code

Pilot Ratio	
Code	Ratio
B ¹	3:1, 4.5:1
K ²	15:1
1 - 4.5:1 option size 020 only 2 - size 020 only	

Size	
Code	Cavity
020	53-1 (5.3 GPM, 6000 PSI) ¹ (5.3 GPM, 5075 PSI) ²
040	68-1 (15.9 GPM, 5075 PSI)
060	3C (48 GPM, 5000 PSI)
1 - pilot ratio B 2 - pilot ratio K	

Adjustment Style	
Code	Style
Z	Screw Adjust


Design Code	
Code	Range
Omit	Size 020 only
MK3	Size 040 only
409	Size 060 only

Highlight represents Global Core product. More detailed information is available in the Global Core Catalog, MSG15-3504, available online at www.parker.com/hvs/resources

Flow Control Valves

NEEDLE VALVES (*NVH series*)

(For more information, see details page [linked here](#))



Needle
Valve



Size



Style



Adjustment
Style



Seal

Size	
Code	Cavity
081	C08-2 (10 GPM, 5500 PSI)
101	C10-2 (16 GPM, 5500 PSI)

Style	
Code	Style
Omit	Coarse
F	Fine


Adjustment Style	
Code	Style
K	Knob
S	Screw
T	Tamperproof

Seal	
Code	Material
Omit	"D"-Ring
N	Nitrile
V	Fluorocarbon

Highlight represents Global Core product. More detailed information is available in the Global Core Catalog, MSG15-3504, available online at www.parker.com/hvs/resources

NEEDLE VALVES w/REVERSE CHECK (*FV series*)

(For more information, see details page [linked here](#))



Needle
Valve



Size



Style



Adjustment
Style



Seal

Size	
Code	Cavity
10	C10-2

Style	
Code	Style
1	Coarse (12 GPM, 3000 PSI)
2	Fine (6 GPM, 3000 PSI)

Adjustment Style	
Code	Style
K	Knob
S	Screw


Seal	
Code	Material
Omit	Nitrile
V	Fluorocarbon

Highlight represents Global Core product. More detailed information is available in the Global Core Catalog, MSG15-3504, available online at www.parker.com/hvs/resources

Flow Control Valves

PRESSURE COMPENSATED (*J0 series*)

(For more information, see details page [linked here](#))



J0		E2	Z	N
Press Comp Flow Control	Size	Style	Adjustment Style	Seal (Nitrile)

Size	
Code	Cavity
2	C08-2 (5.3 GPM, 6000 PSI)
4	C10-2 (10.6 GPM, 6000 PSI)


Style	
Code	Style
E2	Restrictive

Adjustment Style	
Code	Style
Z	Screw

Highlight represents Global Core product. More detailed information is available in the Global Core Catalog, MSG15-3504, available online at www.parker.com/hvs/resources

PRESSURE COMPENSATED w/ REVERSE CHECK (*F*101 series*)

(For more information, see details page [linked here](#))



F		101			
Press Comp Flow Control	Size	Adjustment Style	Regulated Flow Range (OMIT for A size)	Seal	

Size	
Code	Cavity
A	C10-2 (5.5 GPM, 3000 PSI)
C	C10-2 (15 GPM, 3000 PSI)

Adjustment Style	
Code	Style
K	Knob
S	Screw
T	Tamperproof

Flow Range	
FOR "C" SIZE ONLY!	
"A" SIZE range is 0-5.5 GPM.	
Code	Range
050	0.3-1.0 GPM
100	0.75-2.2 GPM
300	2.0-4.5 GPM
600	4.0-8.0 GPM

Seal	
Code	Material
Omit	Nitrile
V	Fluorocarbon

Highlight represents Global Core product. More detailed information is available in the Global Core Catalog, MSG15-3504, available online at www.parker.com/hvs/resources

Flow Control Valves

PRESSURE COMPENSATED FLOW REGULATORS (*FR032 series*)

(For more information, see details page [linked here](#))




FR	032	
Pressure Compensated Flow Regulator	Size	Flow Setting

Size	
Code	Cavity
032	ES10436 (0.3 GPM, 3000 PSI)

Flow Setting	
Code	Setting
010	0.1 GPM
020	0.2 GPM
030	0.3 GPM

PRESSURE COMPENSATED PRIORITY FLOW (*J* series*)

(For more information, see details page [linked here](#))



J		Z	N
Press Comp Flow Control	Size	Adjustment Style	Seal (Nitrile)

Size	
Code	Cavity
02D3	C08-3 (4 GPM, 6000 PSI)
04D3	C10-3 (18 GPM, 6000 PSI) ¹
1A125	3A (40 GPM, 5000 PSI) ²
¹ - Max priority flow 12 GPM ² - Max priority flow 24 GPM	


Adjustment Style	
Code	Style
Z	Screw

Highlight represents Global Core product. More detailed information is available in the Global Core Catalog, MSG15-3504, available online at www.parker.com/hvs/resources

Flow Control Valves

FLOW DIVIDER/COMBINERS (*L0 series*)

(For more information, see details page [linked here](#))



L0

Flow
Divider/
Combiner

Size

-

Flow
Division

N

Seal
(Nitrile)

Size	
Code	Cavity
4A3	C10-4 (16 GPM, 6000 PSI)
6A3	C16-4 (47 GPM, 6000 PSI)


Highlight represents Global Core product. More detailed information is available in the Global Core Catalog, MSG15-3504, available online at www.parker.com/hvs/resources

Flow Division			
Code	Min Inlet	Max Inlet	Split
10-10 ¹	2.1 GPM	5.3 GPM	50/50
20-20 ¹	3.2 GPM	10.6 GPM	50/50
30-30 ¹	3.7 GPM	15.9 GPM	50/50
60-60 ²	9.2 GPM	31.7 GPM	50/50
90-90 ²	17.2 GPM	47.8 GPM	50/50
1 - Size 4A3 only 2 - Size 6A3 only			

Pressure Control Valves

RELIEF VALVES - DIRECT ACTING (*RD series*)

(For more information, see details page [linked here](#))


RD

Relief
Valve
Direct
Acting

Size /
Type

Adjustment
Style

Pressure
Range

Seal

Size / Type	
Code	Cavity
H042	C04-2 (1 GPM, 5500 PSI) / Poppet type
H081	C08-2 (0.5 GPM, 5500 PSI) / Ball type
H082	C08-2 (8 GPM, 5500 PSI) / Poppet type
H101	C10-2 (0.5 GPM, 5500 PSI) / Ball type
102	C10-2 (10 GPM, 3000 PSI) / Poppet type

Adjustment Style	
Code	Style
K	Knob
S	Screw
T	Tamperproof


Pressure Range	
Code	Max Pressure
03 ²	300 PSI
09 ²	900 PSI
10 ³	1000 PSI
15 ¹	1500 PSI
18 ²	1800 PSI
30	3000 PSI
50	5000 PSI
1 - Size H082 only 2 - Size 102 only 3 - Size H081 and H101 only	
For Minimum Pressure, please see product details page.	

Seal	
Code	Material
Omit ¹	"D"-Ring, Nitrile
N ²	Nitrile
V	Fluorocarbon
1 - Size H081, H082, H10, 10 - "D"-Ring Size H042 - Nitrile 2 - Size H081, H082, H10, 10 only	
"D"-Ring for C08 and C10 cavity sizes only!	

Highlight represents Global Core product. More detailed information is available in the Global Core Catalog, MSG15-3504, available online at www.parker.com/hvs/resources

RELIEF VALVES - DIRECT ACTING (*A04B2 series*)

(For more information, see details page [linked here](#))


A

Relief
Valve
Direct
Acting

04B2

Size /
Type

Pressure
Range

Adjustment
Style

Seal
(Nitrile)

Size	
Code	Cavity
04B2	C10-2 (26 GPM, 6000 PSI) / Poppet type

Pressure Range	
Code	Max Pressure
H	3000 PSI
P	6000 PSI

Adjustment Style	
Code	Style
Z	Screw


For Minimum Pressure, please see product details page.

Highlight represents Global Core product. More detailed information is available in the Global Core Catalog, MSG15-3504, available online at www.parker.com/hvs/resources

Pressure Control Valves

RELIEF VALVES - DIFFERENTIAL AREA (*RD series*)

(For more information, see details page [linked here](#))



RD

Relief Valve
Differential Area

Size

Adjustment Style

Pressure Range

Seal

Size	
Code	Cavity
H083	C08-2 (12 GPM, 5000 PSI)
H103	C10-2 (20 GPM, 5000 PSI)
163	C16-2 (40 GPM, 3000 PSI)

Highlight represents Global Core product. More detailed information is available in the Global Core Catalog, MSG15-3504, available online at www.parker.com/hvs/resources

Adjustment Style	
Code	Style
K	Knob
S	Screw
T	Tamperproof

Pressure Range	
Code	Max Pressure
10 ²	1000 PSI
15 ¹	1500 PSI
30	3000 PSI
50 ³	5000 PSI

1 - Size H083 only
2 - Size H103 and 163 only
3 - Size H083 and H103 only

For Minimum Pressure, please see product details page.


Seal	
Code	Material
Omit ¹	"D"-Ring, Nitrile
N ²	Nitrile
V	Fluorocarbon

1 - Size H103 - "D"-Ring
Size H083, 163 - Nitrile
2 - Size H103 only

"D"-Ring for C10 cavity size only!

RELIEF VALVES - PILOT OPERATED (*RAH series*)

(For more information, see details page [linked here](#))



RAH

Relief Valve
Pilot Operated

Size

Adjustment Style

Pressure Range

Seal

Size	
Code	Cavity
081	C08-2 (20 GPM, 5000 PSI)
101	C10-2 (30 GPM, 5000 PSI)
121	C12-2 (50 GPM, 5500 PSI)
161	C16-2 (80 GPM, 5500 PSI)
201	C20-2 (100 GPM, 5500 PSI)

Highlight represents Global Core product. More detailed information is available in the Global Core Catalog, MSG15-3504, available online at www.parker.com/hvs/resources

Adjustment Style	
Code	Style
K	Knob
S	Screw
T	Tamperproof

Pressure Range	
Code	Max Pressure
10	1000 PSI
30	3000 PSI
50	5000 PSI

For Minimum Pressure, please see product details page.

Seal	
Code	Material
Omit ¹	"D"-Ring, Nitrile
N ²	Nitrile
V	Fluorocarbon


1 - Size 081, 101 - "D"-Ring
Size 121, 161, 201 - Nitrile
2 - Size 081, 101 only

"D"-Ring for C08 and C10 cavity sizes only!

Pressure Control Valves

RELIEF VALVES - CROSSOVER (A04J2 series)

(For more information, see details page [linked here](#))

**A**

Relief Valve
Crossover

04J2

Size

M

Pressure
Range

Z

Adjustment
Style

N

Seal
(Nitrile)

Size	
Code	Cavity
04J2	C10-2 (32 GPM, 5000 PSI)

Pressure Range	
Code	Max Pressure
M	5000 PSI


Adjustment Style	
Code	Style
Z	Screw

**For Minimum Pressure,
please see product
details page.**

Highlight represents Global Core product. More detailed information is available in the Global Core Catalog, MSG15-3504, available online at www.parker.com/hvs/resources

UNLOADING VALVES (RU10 series)

(For more information, see details page [linked here](#))

**RU**

Unloading
Valve

Size

Adjustment
Style

Pressure
Range

Reload

Seal

Size	
Code	Cavity
101	C10-3 (1 GPM, 3500 PSI)
104	C10-4 (0.25 GPM, 3600 PSI)

Adjustment Style	
Code	Style
K ¹	Knob
S	Screw
T ²	Tamperproof
1 - Size 101 only 2 - Size 104 only	

Pressure Range	
Code	Max Pressure
10 ¹	1000 PSI
12 ²	1200 PSI
24 ²	2400 PSI
30 ¹	3000 PSI
36 ²	3600 PSI
1 - Size 101 only 2 - Size 104 only	


Reload (+/- 5% of pressure setting)	
Code	Style
B ²	80%
C ¹	80%
1 - Size 101 only 2 - Size 104 only	

Seal	
Code	Material
Omit ¹	"D"-Ring, Nitrile
N ²	Nitrile
V	Fluorocarbon
1 - Size 104 - "D"-Ring Size 101 - Nitrile 2 - Size 104 only	
"D"-Ring for C10-4 cavity size only!	

Highlight represents Global Core product. More detailed information is available in the Global Core Catalog, MSG15-3504, available online at www.parker.com/hvs/resources

**For Minimum Pressure,
please see product
details page.**

SEQUENCE VALVES - INTERNAL P.O. (SVH**1 series) (For more information, see details page [linked here](#))


SVH

Sequence
Valve
Int. Pilot
Operated

Size

Adjustment
Style

Pressure
Range

Seal

Size	
Code	Cavity
081	C08-3 (12 GPM, 5500 PSI)
101	C10-3 (15 GPM, 5500 PSI)
161	C16-3 (40 GPM, 5500 PSI)

Adjustment Style	
Code	Style
K	Knob
S	Screw
T	Tamperproof

Pressure Range	
Code	Max Pressure
10	1000 PSI
30	3000 PSI
50	5000 PSI

Seal	
Code	Material
Omit ¹	"D"-Ring, Nitrile
N ²	Nitrile
V	Fluorocarbon


**For Minimum Pressure,
please see product
details page.**

1 - Size 081, 101 - "D"-Ring
Size 161 - Nitrile
2 - Size 081, 101 only

**"D"-Ring for C08 and
C10 cavity sizes only!**

Highlight represents Global Core product. More detailed information is available in the Global Core Catalog, MSG15-3504, available online at www.parker.com/hvs/resources

SEQUENCE VALVES - EXTERNAL P.O. (SVH1*2 series) (For more information, see details page [linked here](#))


SVH

Sequence
Valve
Ext. Pilot
Operated

Size

Adjustment
Style

Pressure
Range

Seal

Size	
Code	Cavity
102	C10-3 (15 GPM, 5500 PSI)
162	C16-3 (40 GPM, 5500 PSI)

Adjustment Style	
Code	Style
K	Knob
S	Screw
T	Tamperproof

Pressure Range	
Code	Max Pressure
10	1000 PSI
30	3000 PSI
50	5000 PSI

Seal	
Code	Material
Omit ¹	"D"-Ring, Nitrile
N ²	Nitrile
V	Fluorocarbon

**For Minimum Pressure,
please see product
details page.**

1 - Size 102 - "D"-Ring
Size 162 - Nitrile
2 - Size 102 only


**"D"-Ring for C10 cavity
size only!**

Highlight represents Global Core product. More detailed information is available in the Global Core Catalog, MSG15-3504, available online at www.parker.com/hvs/resources

Pressure Control Valves

SEQUENCE VALVES - DIRECT ACTING (SV10 series)

(For more information, see details page [linked here](#))


SV

Sequence
Valve
Direct
Acting

Size

Adjustment
Style

Pressure
Range

Seal

Size		
Code	Cavity	Symbol
103	C10-3 (15 GPM, 3600 PSI)	
104	C10-4 (8 GPM, 3600 PSI)	
105	C10-3 (10 GPM, 3600 PSI)	


Adjustment Style	
Code	Style
K	Knob
S	Screw
T	Tamperproof

Pressure Range	
Code	Max Pressure
06	600 PSI
20	2000 PSI
For Minimum Pressure, please see product details page.	

Seal	
Code	Material
Omit	"D"-Ring
N	Nitrile
V	Fluorocarbon

REDUCING VALVES - PILOT OPERATED (PRH**2 series)

(For more information, see details page [linked here](#))


PRH

Reducing
Valve
Pilot
Operated

Size

Adjustment
Style

Pressure
Range

Seal

Size	
Code	Cavity
082	C08-3 (8 GPM, 5500 PSI)
102	C10-3 (15 GPM, 5500 PSI)
122	C12-3 (30 GPM, 5500 PSI)
162	C16-3 (40 GPM, 5500 PSI)

Adjustment Style	
Code	Style
K	Knob
S	Screw
T	Tamperproof

Pressure Range	
Code	Max Pressure
10	1000 PSI
30	3000 PSI
50	5000 PSI
For Minimum Pressure, please see product details page.	


Seal	
Code	Material
Omit ¹	"D"-Ring, Nitrile
N ²	Nitrile
V	Fluorocarbon
¹ - Size 082, 102 - "D"-Ring Size 122, 162 - Nitrile ² - Size 082, 102 only	
"D"-Ring for C08 and C10 cavity sizes only!	

Highlight represents Global Core product. More detailed information is available in the Global Core Catalog, MSG15-3504, available online at www.parker.com/hvs/resources

Pressure Control Valves

REDUCING/RELIEVING VALVES - D.A. (PR103 series)

(For more information, see details page [linked here](#))


PR

Reducing/
Relieving
Valve
D.A.

103

Size



Adjustment
Style



Pressure
Range



Seal

Size	
Code	Cavity
103	C10-3 (15 GPM, 3000 PSI)

Highlight represents Global Core product. More detailed information is available in the Global Core Catalog, MSG15-3504, available online at www.parker.com/hvs/resources


Adjustment Style	
Code	Style
K	Knob
S	Screw
T	Tamperproof

Pressure Range	
Code	Max Pressure
12	1200 PSI
21	1800 PSI
For Minimum Pressure, please see product details page.	

Seal	
Code	Material
Omit	"D"-Ring
N	Nitrile
V	Fluorocarbon

REDUCING/RELIEVING VALVES - P.O. (PRH**1 series)

(For more information, see details page [linked here](#))


PRH

Reducing
Valve
Pilot
Operated



Size



Adjustment
Style



Pressure
Range



Seal

Size	
Code	Cavity
081	C08-3 (8 GPM, 5500 PSI)
101	C10-3 (15 GPM, 5500 PSI)
121	C12-3 (30 GPM, 5500 PSI)
161	C16-3 (40 GPM, 5500 PSI)

Highlight represents Global Core product. More detailed information is available in the Global Core Catalog, MSG15-3504, available online at www.parker.com/hvs/resources

Adjustment Style	
Code	Style
K	Knob
S	Screw
T	Tamperproof


Pressure Range	
Code	Max Pressure
10	1000 PSI
30	3000 PSI
50	5000 PSI
For Minimum Pressure, please see product details page.	

Seal	
Code	Material
Omit ¹	"D"-Ring, Nitrile
N ²	Nitrile
V	Fluorocarbon
¹ - Size 081, 101 - "D"-Ring ² - Size 121, 161 - Nitrile "D"-Ring for C08 and C10 cavity sizes only!	

Logic Element Valves

LOGIC ELEMENT - POPPET TYPE (*LE101A series*)

(For more information, see details page [linked here](#))



LE

Logic
Element

101

Size /
Type

A

Normally
Closed /
Pilot to
Close

Bias
Spring

Seal

Size	
Code	Cavity
101	C10-3S (15 GPM, 5000 PSI) / Poppet Type


Bias Spring	
Code	Range
02	25 PSI
04	50 PSI
05	75 PSI
07	100 PSI
10	150 PSI

Seal	
Code	Material
Omit	"D"-Ring
N	Nitrile
V	Fluorocarbon

Highlight represents Global Core product. More detailed information is available in the Global Core Catalog, MSG15-3504, available online at www.parker.com/hvs/resources

LOGIC ELEMENT - POPPET TYPE (***SLC1-A series*)

(For more information, see details page [linked here](#))



Size

SLC1

Logic
Element
Poppet
Type

A

Normally
Closed /
Pilot to
Close

Bias
Spring

Seal

Size	
Code	Cavity
16	C16-3S (50 GPM, 3500 PSI)
20	C20-3S (80 GPM, 3500 PSI)

Bias Spring	
Code	Range
25	25 PSI
50	50 PSI
75	75 PSI
100 ¹	100 PSI
150 ¹	150 PSI
¹ - Indicates larger cap height	


Seal	
Code	Material
Omit	Polyurethane, EPS
V	Fluorocarbon

Highlight represents Global Core product. More detailed information is available in the Global Core Catalog, MSG15-3504, available online at www.parker.com/hvs/resources

Logic Element Valves

LOGIC ELEMENT - SPOOL TYPE (*LE102A series*)

(For more information, see details page [linked here](#))



LE

Logic
Element

102

Size /
Type

A

Normally
Closed /
Pilot to
Close

Bias
Spring

Seal

Size	
Code	Cavity
102	C10-3S (15 GPM, 5000 PSI) / Spool Type


Bias Spring	
Code	Range
01	25 PSI
05	50 PSI
07	100 PSI
10	150 PSI
15	218 PSI
20	290 PSI

Seal	
Code	Material
Omit	"D"-Ring
N	Nitrile
V	Fluorocarbon

Highlight represents Global Core product. More detailed information is available in the Global Core Catalog, MSG15-3504, available online at www.parker.com/hvs/resources

LOGIC ELEMENT - SPOOL TYPE (***SLC2-A series*)

(For more information, see details page [linked here](#))



Size

SLC2

Logic
Element
Spool
Type

A

Normally
Closed /
Pilot to
Close

Bias
Spring

Seal

Size	
Code	Cavity
16	C16-3S (50 GPM, 3500 PSI)
20	C20-3S (80 GPM, 3500 PSI)


Bias Spring	
Code	Range
25	25 PSI
50	50 PSI
75	75 PSI
100 ¹	100 PSI
150 ¹	150 PSI
¹ - Indicates larger cap height	

Seal	
Code	Material
Omit	Polyurethane, EPS
V	Fluorocarbon

Logic Element Valves

LOGIC ELEMENT - SPOOL TYPE (*R0*E3 series*)

(For more information, see details page [linked here](#))



R0		E3	-		N
Logic Element Spool Type	Size	Normally Closed / Pilot to Close	Bias Spring	Seal (Nitrile)	


Size	
Code	Cavity
6	C16-3S (106 GPM, 6000 PSI)
8	C20-3S (132 GPM, 6000 PSI)

Bias Spring	
Code	Range
10.0	145 PSI
15.0	218 PSI

Highlight represents Global Core product. More detailed information is available in the Global Core Catalog, MSG15-3504, available online at www.parker.com/hvs/resources

LOGIC ELEMENT - SPOOL TYPE (*LE102B series*)

(For more information, see details page [linked here](#))



LE	102	B		
Logic Element	Size / Type	Normally Closed / Vent to Open	Bias Spring	Seal

Size	
Code	Cavity
102	C10-3S (15 GPM, 5000 PSI) / Spool Type

Bias Spring	
Code	Range
01	25 PSI
05	50 PSI
07	100 PSI
10	150 PSI
15	218 PSI
20	290 PSI


Seal	
Code	Material
Omit	"D"-Ring
N	Nitrile
V	Fluorocarbon

Highlight represents Global Core product. More detailed information is available in the Global Core Catalog, MSG15-3504, available online at www.parker.com/hvs/resources

Logic Element Valves

LOGIC ELEMENT - SPOOL TYPE (***SLC2-B series*)

(For more information, see details page [linked here](#))



Size



Logic
Element
Spool
Type



Normally
Closed /
Vent to
Open



Bias
Spring



Seal

Size	
Code	Cavity
16	C16-3S (50 GPM, 3500 PSI)
20	C20-3S (80 GPM, 3500 PSI)


Bias Spring	
Code	Range
25	25 PSI
50	50 PSI
75	75 PSI
100 ¹	100 PSI
150 ¹	150 PSI

¹ - Indicates larger cap height

Seal	
Code	Material
Omit	Polyurethane, EPS
V	Fluorocarbon

LOGIC ELEMENT - SPOOL TYPE (*LE103A series*)

(For more information, see details page [linked here](#))



Logic
Element



Size /
Type



Normally
Open /
Vent to
Close



Bias
Spring



Seal

Size	
Code	Cavity
103	C10-3S (15 GPM, 5000 PSI) / Spool Type

Bias Spring	
Code	Range
01	25 PSI
05	50 PSI
07	100 PSI
10	150 PSI
15	218 PSI
20	290 PSI


Seal	
Code	Material
Omit	"D"-Ring
N	Nitrile
V	Fluorocarbon

Highlight represents Global Core product. More detailed information is available in the Global Core Catalog, MSG15-3504, available online at www.parker.com/hvs/resources

Logic Element Valves

LOGIC ELEMENT - SPOOL TYPE (***SLC3-A series*)

(For more information, see details page [linked here](#))



Size



SLC3 -
Logic
Element
Spool
Type



Normally
Closed /
Vent to
Open



Bias
Spring



Seal

Size	
Code	Cavity
16	C16-3S (50 GPM, 3500 PSI)
20	C20-3S (80 GPM, 3500 PSI)


Bias Spring	
Code	Range
25	25 PSI
50	50 PSI
75	75 PSI
100 ¹	100 PSI
150 ¹	150 PSI

¹ - Indicates larger cap height

Seal	
Code	Material
Omit	Polyurethane, EPS
V	Fluorocarbon

LOGIC ELEMENT - SPOOL TYPE (*R0*H3 series*)

(For more information, see details page [linked here](#))



R0
Logic
Element
Spool
Type



Size



Normally
Open /
Vent to
Close



Bias
Spring



Seal
(Nitrile)

Size	
Code	Cavity
6	C16-3S (42 GPM, 6000 PSI)


Bias Spring	
Code	Range
10.0	145 PSI
15.0	218 PSI

Highlight represents Global Core product. More detailed information is available in the Global Core Catalog, MSG15-3504, available online at www.parker.com/hvs/resources

Logic Element Valves

LOGIC ELEMENT - SPOOL TYPE (*LE103B series*)

(For more information, see details page [linked here](#))



LE
Logic Element

103
Size / Type

B
Normally Closed / Vent to Open

Bias Spring

Seal

Size	
Code	Cavity
103	C10-3S (15 GPM, 5000 PSI) / Spool Type


Bias Spring	
Code	Range
01	25 PSI
05	50 PSI
07	100 PSI
10	150 PSI
15	218 PSI
20	290 PSI

Seal	
Code	Material
Omit	"D"-Ring
N	Nitrile
V	Fluorocarbon

Highlight represents Global Core product. More detailed information is available in the Global Core Catalog, MSG15-3504, available online at www.parker.com/hvs/resources

LOGIC ELEMENT - SPOOL TYPE (***SLC3-B series*)

(For more information, see details page [linked here](#))



Size

SLC3
Logic Element Spool Type

B
Normally Closed / Vent to Open

Bias Spring

Seal

Size	
Code	Cavity
16	C16-3S (50 GPM, 3500 PSI)
20	C20-3S (80 GPM, 3500 PSI)

Bias Spring	
Code	Range
25	25 PSI
50	50 PSI
75	75 PSI
100 ¹	100 PSI
150 ¹	150 PSI
¹ - Indicates larger cap height	

Seal	
Code	Material
Omit	Polyurethane, EPS
V	Fluorocarbon

Directional Control Valves

DIRECTIONAL CONTROL - 3-Way (DH103 series)

(For more information, see details page [linked here](#))



DH

Directional
Control
/ Closed
Transition

103

Size




Function

Shift
Pressure

Seal

Size	
Code	Cavity
103	C10-4 (10 GPM, 5000 PSI)

Highlight represents Global Core product. More detailed information is available in the Global Core Catalog, MSG15-3504, available online at www.parker.com/hvs/resources


Function	
Code	Function
A	N.O., 2-pos, Vent to Atms. 
B	N.C., 2-pos, Internal Drain 
C	N.O., 2-pos, Internal Drain 

Shift Pressure	
Code	Pressure
Omit	80 PSI
04	40 PSI
16	160 PSI

Seal	
Code	Material
Omit	Nitrile
V	Fluorocarbon

DIRECTIONAL CONTROL - 3-Way (N5* series)

(For more information, see details page [linked here](#))



N5

Directional
Control
/ Open
Transition




Function

Size

-

Shift
Pressure

Seal

Function	
Code	Function
A	All Ports Open 
B	All Ports Closed 
C	Diverter, All Ports Open 

Size	
Code	Cavity
125	5A (42.3 GPM, 6000 PSI)
300 [†]	100-1 (105 GPM, 6000 PSI)
[†] 1 - Function A and B only	

Seal	
Code	Material
N	Nitrile
V	Fluorocarbon


Shift Pressure	
Code	Pressure
5.0 [†]	73 PSI
6.9	100 PSI
10.0	145 PSI
15.0 [†]	217 PSI
[†] 1 - Size 125 only	

Highlight represents Global Core product. More detailed information is available in the Global Core Catalog, MSG15-3504, available online at www.parker.com/hvs/resources

Manual Valves

MANUAL VALVE - 2-POS./2-WAY (DL*** series)

(For more information, see details page [linked here](#))


DL

Manual
Valve /
Poppet
Type

Size

Actuator
Type

Seal

Size	
Code	Cavity
081	C08-2 (8 GPM, 3000 PSI)
101	C10-2 (13 GPM, 3000 PSI)

Actuator	
Code	Type
K	Knob
L ¹	Lever
P ¹	Lock Pin
T	Stem
1 - Size 081 only.	

Seal	
Code	Material
Omit ¹	"D"-Ring, Nitrile
N ²	Nitrile
V	Fluorocarbon
1 - Size 081 with actuator K, P, or T - "D"-Ring Size 101 - Nitrile	
2 - Size 081 only	

MANUAL VALVE - ROTARY SPOOL (DM*** series)

(For more information, see details page [linked here](#):
[DM103](#) [DM104](#))


DM

Manual
Valve /
Rotary
Spool

Size

Actuator
Type

Spool
Option
(DM104
Only)

Seal

Size	
Code	Cavity
103	C10-3 (6 GPM, 3500 PSI)
104	C10-4 (2 GPM, 3500 PSI)

Actuator		Schematic	
Code	Type	DM103*	DM104*
K	Knob		
LD	Lever w/2 pos. detent		
LN	Lever w/3 pos. detent		
FKD	Finger Knob w/2 pos. detent		
FKN	Finger Knob w/3 pos. detent		

Spool Option (DM104 Only)		
Code	Style	Schematic
1	Closed Center	
8	Open Center	

Seal	
Code	Material
Omit	Nitrile
V	Fluorocarbon

Manual Valves

MANUAL VALVE - 3-POS./4-WAY (DMH085 series)

(For more information, see details page [linked here](#))


DMH

Manual
Valve /
Directional
Control

Size

Style

Seal

Size	
Code	Cavity
085	C08-4 (5000 PSI) ¹
¹ - Tank (port 1) pressure 500 PSI	

Style		
Code	Style	Schematic
C1	Closed Center / 4.5 GPM	
C2	Open Center / 4.0 GPM	
C4	Floating Center / 5.0 GPM	
C9	Tandem Center / 4.0 GPM	


Seal	
Code	Material
Omit	"D"-Ring
N	Nitrile
V	Fluorocarbon

POPPET TYPE, 2-WAY (DS***1 series)

(For more information, see details page [linked here](#))



Override Options

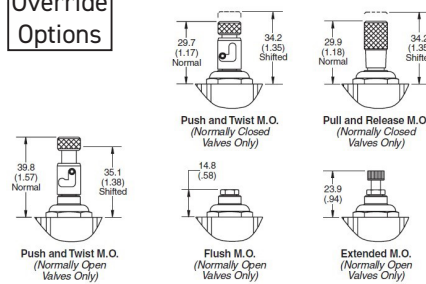

Coil(s) sold separately. Please see section CE for more information.

Model	Super Coil
DS*081	CC (1/2")
DS*101	CA (5/8")
DSH121	CA (5/8")
DSH161	CA (5/8")
DSL201	CA (5/8")

*L=Low Pressure (3600 PSI)
H=High Pressure (5000 PSI)

DS			1				
Solenoid Valve / 2W/2P	Pressure	Size	Poppet Type	Function	Override	Seal	Screen

Pressure	
Code	Max Pressure Rating
L	3600 PSI
H	5000 PSI

Size	
Code	Cavity Size
08	C08-2 (8 GPM)
10	C10-2 (15 GPM)
12 ¹	C12-2 (24 GPM)
16 ¹	C16-2 (40 GPM)
20 ²	C20-2 (70 GPM)
1 - High pressure (5000 psi) only 2 - Low pressure (3600 psi) only	

Function		
Code	Function	
C	Normally Closed Metered Rev. Flow	
CH ¹	Normally Closed Metered Rev. Flow (Fast Response)	
CHR ²	Normally Closed Free Rev. Flow (Fast Response)	
CR	Normally Closed Free Rev. Flow	
N	Normally Open Metered Rev. Flow	
NR	Normally Open Free Rev. Flow	
1 - 08, 10, 12, and 16 size only 2 - 08, 10, and 12 size only		

Override	
Code	Option
Omit	None
E ¹	Push Type, Extended Rod
M ¹	Push Type, Flush Rod
P ^{2,3}	Pull/Release
T	Push/Twist
1 - Normally Open only 2 - Normally Closed only 3 - Low pressure (3600 psi) only	

Seal	
Code	Material
Omit ¹	"D"-Ring, Nitrile
N ²	Nitrile
V	Fluorocarbon
1 - Size 08, 10 - "D"-Ring Size 12, 16, 20 - Nitrile 2 - Size 08, 10 only	
"D"-Ring for C08 and C10 cavity sizes only!	

Highlight represents Global Core product. More detailed information is available in the Global Core Catalog, MSG15-3504, available online at www.parker.com/hvs/resources

North American Regional
Threaded Cartridge Valves

Screen	
Code	Option
Omit	None
S ¹	Screen
1 - 08 & 10 size only	


MSG15-4000
Solenoid Valves

Solenoid Valves

POPPET TYPE, 2-WAY, BI-DIRECTIONAL (*DSL087 series*)



Override
Option



Flush M.O.
(Normally Open
Valves Only)

N.O. only

Coil(s) sold separately.
Please see section CE for
more information.

(For more information, see
details page [linked here](#))

Model	Super Coil
DSL087*	CC (1/2")

DSL

087



Solenoid
Valve /
2W/2P

Size

Style

Override

Screen

Seal

Size	
Code	Cavity Size
087	C08-2 (0.3 GPM)

Function		
Code	Function	
C	Normally Closed (3600 PSI)	
N	Normally Open (3600 PSI)	

Screen	
Code	Option
Omit	None
S	Screen


Highlight represents Global Core product. More detailed information is available in the Global Core Catalog, MSG15-3504, available online at www.parker.com/hvs/resources

Override	
Code	Option
Omit	None
M'	Push Type, Flush Rod
1 - Normally Open only	

Seal	
Code	Material
Omit	"D"-Ring
N	Nitrile
V	Fluorocarbon

Solenoid Valves

POPPET TYPE, 2-WAY, BI-DIRECTIONAL (*GS0*8* series*)

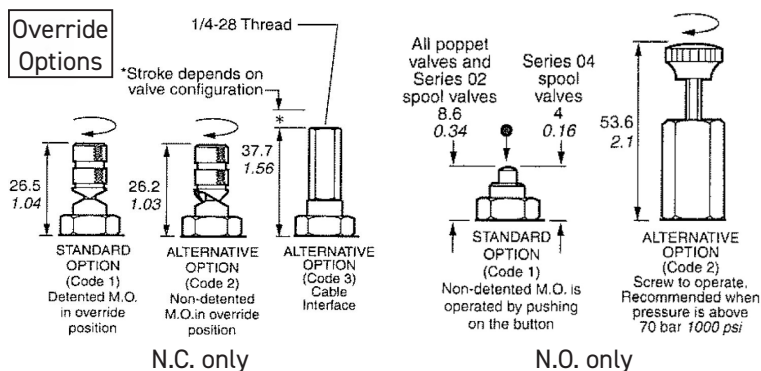

(For more information, see details page [linked here](#))

Coil(s) sold separately. Please see section CE for more information.

Model	Super Coil
GS02*	CC (1/2")
GS04*	CC (1/2")
GS06*	CC (1/2")

GS				0	N
Solenoid Valve / 2W/2P	Size	Function	Override	Screen	Seal (Nitrile)

Size	
Code	Cavity Size
02	C08-2 (9 GPM)
04	2R (18 GPM)
06	C16-2 (75 GPM)

Function		
Code	Function	
80	Normally Closed (3000 PSI)	
81	Normally Closed (5000 PSI)	
85	Normally Open (3000 PSI)	
86	Normally Open (5000 PSI)	

Override			
80/81 (Normally Closed)		85/86 (Normally Open)	
Code	Override	Code	Override
0	None	0	None
1	Detented	1	Non-Detented
2	Non-Detented	2	Detented
3'	Cable Interface		
1 - Function Code 80 only			

Highlight represents Global Core product. More detailed information is available in the Global Core Catalog, MSG15-3504, available online at www.parker.com/hvs/resources


Solenoid Valves

SPOOL TYPE, 2-WAY (DS***2 series)


(For more information, see details page [linked here](#))



Override Options



Push and Twist M.O.



Pull and Release M.O.

Coil(s) sold separately. Please see section CE for more information.

Model	Super Coil
DS*082	CC (1/2")
DS*102	CA (5/8")
DS162	1" DS

*L=Low Pressure (3600 PSI)
H=High Pressure (5000 PSI)

DS			2				
Solenoid Valve / 2W/2P	Pressure	Size	Spool Type	Function	Override	Seal	Screen

Pressure	
Code	Max Pressure Rating
Omit ¹	3000 PSI
L ²	3600 PSI
H ²	5000 PSI

1 - Size 16 only.
2 - Size 08 and 10 only

Function	
Code	Function
C	Normally Closed
N	Normally Open

Override	
Code	Option
Omit ¹	None, Push and Release
P ^{2,3}	Pull and Release
T ²	Push and Twist

1 - Size 08 and 10 - None.
Size 16 - Push and Release.
2 - Size 08 and 10 only.
3 - Low Pressure (3600 psi) only.

P and T for C08 and C10 cavity sizes only!

Size	
Code	Cavity Size
08	C08-2 (4 GPM)
10	C10-2 (8 GPM)
16	C16-2 (20 GPM)

Seal	
Code	Material
Omit ¹	"D"-Ring, Nitrile
N ²	Nitrile
V	Fluorocarbon

1 - Size 08, 10 - "D"-Ring
Size 16 - Nitrile
2 - Size 08, 10 only

"D"-Ring for C08 and C10 cavity sizes only!

Screen	
Code	Option
Omit	None
S ¹	Screen

1 - 08 & 10 size only


Highlight represents Global Core product. More detailed information is available in the Global Core Catalog, MSG15-3504, available online at www.parker.com/hvs/resources

SPOOL TYPE, 3-WAY (DS***3 series)


(For more information, see details page [linked here](#))



Override
Options



Push and Twist M.O.



Pull and Release M.O.

Coil(s) sold separately.
Please see section CE for
more information.

Model	Super Coil
DS*083	CC (1/2")
DS*103	CA (5/8")
DS163	1" DS

*L=Low Pressure (3600 PSI)
H=High Pressure (5000 PSI)

DS			3			
Solenoid Valve / 3W/2P	Pressure	Size	Spool Type	Spool Function	Override	Seal

Pressure	
Code	Max Pressure Rating
Omit ¹	3000 PSI
L ²	3600 PSI
H ²	5000 PSI

1 - Size 16 only.
2 - Size 08 and 10 only.

Size	
Code	Cavity Size
08	C08-3 (up to 4 GPM)
10	C10-3 (up to 8 GPM)
16	C16-3 (up to 15 GPM)

Spool Function	
Code	Function
Omit ¹	
A ²	
B	
C ²	
N ²	

1 - Size 16 only.
2 - Size 08 and 10 only.

Override	
Code	Option
Omit ¹	None, Push and Release
P ^{2,3}	Pull and Release
T ²	Push and Twist

1 - Size 08 and 10 - None.
Size 16 - Push and Release.
2 - Size 08 and 10 only.
3 - Size 08 and 10, Low Pressure (3600 psi) only.

P and T for C08 and C10 cavity sizes only!

Seal	
Code	Material
Omit ¹	"D"-Ring, Nitrile
N ²	Nitrile
V	Fluorocarbon

1 - Size 08, 10 - "D"-Ring
Size 16 - Nitrile
2 - Size 08, 10 only

"D"-Ring for C08 and C10 cavity sizes only!

Highlight represents Global Core product. More detailed information is available in the Global Core Catalog, MSG15-3504, available online at www.parker.com/hvs/resources

Solenoid Valves


34

SPOOL TYPE, 4-WAY, 2-POS. (DS***4 series)


(For more information, see details page [linked here](#))



Override Options



Push and Twist M.O.



Pull and Release M.O.

Coil(s) sold separately. Please see section CE for more information.

Model	Super Coil
DS*084	CC (1/2")
DS*104	CA (5/8")
DSH164	CC (1/2")

*L=Low Pressure (3600 PSI)
H=High Pressure (5000 PSI)



Solenoid Valve / 4W/2P Pressure Size Spool Type Spool Function Override Seal

Pressure	
Code	Max Pressure Rating
L ¹	3600 PSI
H	5000 PSI

1 - Size 08 and 10 only.

Size	
Code	Cavity Size
08	C08-4 (up to 4 GPM)
10	C10-4 (up to 10 GPM)
16	C16-4 (30 GPM)

Highlight represents Global Core product. More detailed information is available in the Global Core Catalog, MSG15-3504, available online at www.parker.com/hvs/resources

Spool Function													
Size 08		Size 10		Size 16									
Code	Function	Code	Function	Code	Function								
B		B		H									
E1		B2		HR									
M		E1		Seal <table><tr><th>Code</th><th>Material</th></tr><tr><td>Omit¹</td><td>"D"-Ring, Nitrile</td></tr><tr><td>N²</td><td>Nitrile</td></tr><tr><td>V</td><td>Fluorocarbon</td></tr></table>		Code	Material	Omit ¹	"D"-Ring, Nitrile	N ²	Nitrile	V	Fluorocarbon
Code	Material												
Omit ¹	"D"-Ring, Nitrile												
N ²	Nitrile												
V	Fluorocarbon												
M9		E4		1 - Size 08, 10 - "D"-Ring Size 16 - Nitrile 2 - Size 08, 10 only									
N		E15		"D"-Ring for C08 and C10 cavity sizes only!									
		H		Override <table><tr><th>Code</th><th>Option</th></tr><tr><td>Omit</td><td>None</td></tr><tr><td>P^{1,2}</td><td>Pull and Release</td></tr><tr><td>T¹</td><td>Push and Twist</td></tr></table>		Code	Option	Omit	None	P ^{1,2}	Pull and Release	T ¹	Push and Twist
Code	Option												
Omit	None												
P ^{1,2}	Pull and Release												
T ¹	Push and Twist												
		M		1 - Size 08 and 10 only. 2 - Low Pressure (3600 psi) only.									
		N											


Solenoid Valves

SPOOL TYPE, 4-WAY, 2-POS. (GS0242* series)

(For more information, see details page [linked here](#))



Override Options

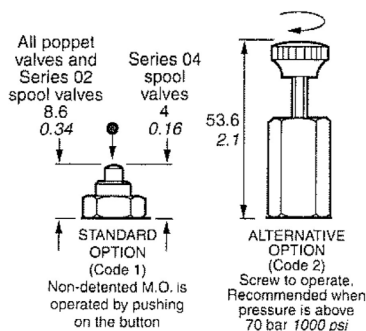

Coil(s) sold separately. Please see section CE for more information.

Model	Super Coil
GS0242*	CC (1/2")

GS

Solenoid Valve / 4W/2P

02

Size

42

Function

Override

0

Screen

N

Seal (Nitrile)

Size	
Code	Cavity Size
02	C08-4 (5000 PSI, 5 GPM)

Spool Function	
Code	Function
42	

Override	
Code	Option
0	None
1	Non-Detented
2	Detented

Screen	
Code	Option
0	None


Solenoid Valves

SPOOL TYPE, 4-WAY, 3-POS. (DSL 105 series)

(For more information, see details page [linked here](#))



Override
Option



Push and Pull M.O.

Coil(s) sold separately.
Please see section CE for
more information.

Model	Super Coil
DSL105	CA (5/8")

DS	L	10	5			
Solenoid Valve / 4W/3P	Pressure	Size	Spool Type	Spool Function	Override	Seal

Pressure	
Code	Max Pressure Rating
L	3600 PSI

Size	
Code	Cavity Size
10	C10-4

Spool Function	
Code	Function
C1 (7 GPM)	
C2 (5 GPM)	
C4 (7 GPM)	
C7 (5 GPM)	
C9 (5 GPM)	

Override	
Code	Option
Omit	None
M	Push/Pull

Seal	
Code	Material
Omit	"D"-Ring
N	Nitrile
V	Fluorocarbon


Highlight represents Global Core product. More detailed information is available in the Global Core Catalog, MSG15-3504, available online at www.parker.com/hvs/resources

SPOOL TYPE, 4-WAY, 3-POS. (GS0*5* series)


(For more information, see details page [linked here](#))




Override Options



GS025* only



GS045* only



Coil(s) sold separately. Please see section CE for more information.

Model	Super Coil
GS025*	CC (1/2")
GS045*	CA (5/8")

GS				0		D
Solenoid Valve / 4W/3P	Size	Spool Type	Override	Screen	Seal	Design Level (GS045 Only)

Size	
Code	Cavity Size
02	C08-4 (5000 PSI) ¹
04	C10-4 (5000 PSI) ¹
¹ - Tank (port 1) pressure 3000 PSI	

Override			
Size 02		Size 04	
Code	Override	Code	Override
0	None	0	None
1	Non-Detented	5	Detented (center only)
2	Detented	6	Detented (all positions)

Spool Function			
Size 02		Size 04	
Code	Function	Code	Function
51 (4.5 GPM)		52 (11 GPM)	
53 (4 GPM)		54 (11 GPM)	
57 (3.5 GPM)		57 (11 GPM)	
59 (3.5 GPM)		59 (11 GPM)	

Screen	
Code	Option
0	None

Seal	
Code	Material
N	Nitrile
V	Fluorocarbon


Highlight represents Global Core product. More detailed information is available in the Global Core Catalog, MSG15-3504, available online at www.parker.com/hvs/resources

SPOOL TYPE, 4-WAY, 3-POS. (DSH125 series)

(For more information, see details page [linked here](#))



Override
Option



Coil(s) sold separately.
Please see section CE for
more information.

Model	Super Coil
DSH125	CA (5/8")



Solenoid Valve / 4W/3P Pressure Size Spool Type / Function Override Seal

Pressure	
Code	Max Pressure Rating
H	5000 PSI
1 - Tank (port 1) max pressure 3000 PSI.	

Size	
Code	Cavity Size
12	C12-4L (15 GPM)

Spool Function	
Code	Function
52	
54	
57	
59	

Override	
Code	Option
Omit	None
DN	Latch Operated

Seal	
Code	Material
N	Nitrile
V	Fluorocarbon

Proportional Valves

PRESSURE RELIEVING (AP0* series)

(For more information, see details page [linked here](#))



AP

Proportional
Valve /
Relieving

Size

Function

Pressure
Setting

Seal

Variation

Coil(s) sold separately. Please see section CE for more information.

Size	
Code	Cavity
02B2	C08-2 (5000 PSI)
04G2	C10-2 (5000 PSI)

Function		
Code	Function	
YP	Increase Pressure / Increase Current	
YR	Decrease Pressure / Increase Current	

Model	Super Coil
AP02B2YP	CC (1/2")
AP02B2YR	CA (5/8")
AP04G2*	CC (1/2")

Pressure Setting					
AP02B2				AP04G2	
YP		YR		YP and YR	
Code	Setting	Code	Setting	Code	Setting
07C	1000 PSI (1.4 GPM)	07A	1000 PSI (1.4 GPM)	10C	1000 PSI (25 GPM)
14C	2000 PSI (0.9 GPM)	14A	2000 PSI (0.9 GPM)	21C	3000 PSI (25 GPM)
21C	3000 PSI (0.8 GPM)	21A	3000 PSI (0.8 GPM)	35C	5000 PSI (25 GPM)
35C	5000 PSI (.35 GPM)	35A	5000 PSI (.35 GPM)		

Seal	
Code	Material
Omit ¹	"D"-Ring
N	Nitrile
V	Fluorocarbon
1 - Size 02B2 only	
"D"-Ring for C08 cavity size only!	

Variation	
Code	Option
Omit ¹	Standard
L ²	Low
1 - AP02B2YP and AP04G2* only	
2 - AP02B2YR only	

Highlight represents Global Core product. More detailed information is available in the Global Core Catalog, MSG15-3504, available online at www.parker.com/hvs/resources

Proportional Valves

PRESSURE REDUCING/RELIEVING (*EPR*** series*)

(For more information, see details page [linked here](#))


EPR

Proportional
Valve /
Reducing/
Relieving



Size



Function



Pressure
Range



Seal

Coil(s) sold separately. Please see section CE for more information.

Model	Super Coil
EPR083*	SW7L (1/2" Short)
EPR111*	CC (1/2")

Size / Function			
Code	Cavity Size	Function	
083R	C08-3L (6 GPM, 5000 PSI)	Pilot Operated, Increasing Current/Increasing Pressure	
111C	C10-3L (10 GPM, 5000 PSI)	Pilot Operated, Increasing Current/Increasing Pressure	

Pressure Range	
Code	Cavity Size
02 ¹	200 PSI
03 ¹	300 PSI
05 ¹	500 PSI
10	1000 PSI
20	2000 PSI
30	3000 PSI
40	4000 PSI
¹ - Size 111C only	

Seal	
Code	Material
Omit	"D"-Ring
N	Nitrile
V	Fluorocarbon

Highlight represents Global Core product. More detailed information is available in the Global Core Catalog, MSG15-3504, available online at www.parker.com/hvs/resources

Proportional Valves

FLOW CONTROL, POPPET, 2-WAY (*FAP*** series*)

(For more information, see details page [linked here](#))


FAP

Flow Control
/ 2W
Poppet



Size



Function



Flow Option
(**FAP101C**
Only)



Override
(**FAP101C**
Only)



Seal

Coil(s) sold separately.
Please see section CE
for more information.

Model	Super Coil
FAP***	CA (5/8")

Size	
Code	Cavity Size
081	C08-2 (3000 PSI) 7 GPM (N.C.) 10.5 GPM (N.O.)
101	C10-2 (3000 PSI) 10.5 GPM (N.C.) 14.5 GPM (N.O.)
121	C12-2F (3000 PSI) 21.5 GPM (N.C.) 26 GPM (N.O.)
161	C16-2 (3000 PSI) 28 GPM (N.C.) 31 GPM (N.O.)

Function		
Code	Function	
C	Normally Closed	
N	Normally Open	

Seal	
Code	Material
Omit ¹	"D"-Ring, Nitrile
N ²	Nitrile
V	Fluorocarbon
1 - Size 081, 101 - "D"-Ring Size 121, 161 - Nitrile 2 - Size 081, 101 only	
"D"-Ring for C08 and C10 cavity sizes only!	

Flow Option (FAP101C only)	
Code	Option
Omit	Standard (10.5 GPM)
H ¹	High (13 GPM)
1 - FAP101C only	

Override (FAP101C only)	
Code	Option
Omit	None
M ¹	Screw Type
1 - Not for High Flow	

Proportional Valves

FLOW CONTROL, SPOOL, 2-WAY (DF***series)

(For more information, see details page [linked here](#))


DF

Flow
Control
/ 2W
Spool



Size



Function



Flow
Rate



Override



Seal

Coil(s) sold separately.
Please see section CE
for more information.

Model	DS Coil
DS163	1" DS

Size	
Code	Cavity Size
122	C12-2 (3000 PSI)

Function		
Code	Function	
C	Normally Closed	
N	Normally Open	

Flow Rate	
Code	Flow Rate
14	14 GPM

Override	
Code	Option
Omit	Push Type w/Extended Rod

Seal	
Code	Material
Omit	Nitrile
V	Fluorocarbon

Proportional Valves

FLOW CONTROL, SPOOL, 2-WAY(JP*** series)

(For more information, see details page [linked here](#))



Flow Control
/ 2W
Spool



Size



Function



Flow Rate



Override



Screen



Seal



Flow Variation

Coil(s) sold separately. Please see section CE for more information.

Model	Super Coil
JP02*	CC (1/2")
JP04*	CA (5/8")

Size	
Code	Cavity Size
02	C08-2 (3000 PSI)
04	3X (3000 PSI)

Function		
Code	Function	
C	Normally Closed	
P	Normally Open	

Flow Rate			
JP02*		JP04*	
Code	Flow Rate	Code	Flow Rate
20	up to 2 GPM	21	up to 9.5 GPM
21	up to 6 GPM		

Override	
Code	Option
0	None
5	Infinite Control

Screen	
Code	Option
0	None
1	Screen (on port 2)

Seal	
Code	Material
N	Nitrile
V	Fluorocarbon

Flow Variation	
Code	Variation
Omit	Standard (+/- 20%)
L	Low Variation (+/- 7%)

Highlight represents Global Core product. More detailed information is available in the Global Core Catalog, MSG15-3504, available online at www.parker.com/hvs/resources

Proportional Valves

FLOW CONTROL, SPOOL, 3-WAY (JP04C31 series)

(For more information, see details page [linked here](#))



JP	04	C	31		0		
Flow Control / 3W Spool	Size	Function	Flow Rate	Override	Screen	Seal	Flow Variation

Coil(s) sold separately. Please see section CE for more information.

Model	Super Coil
JP04C31	CA (5/8")

Size	
Code	Cavity Size
04	4C (3000 PSI)

Function	
Code	Function
C	Normally Closed

Flow Rate	
Code	Override
31	up to 8 GPM

Override	
Code	Option
0	None
5	Infinite Control

Screen	
Code	Option
0	None

Seal	
Code	Material
N	Nitrile
V	Fluorocarbon

Flow Variation	
Code	Variation
Omit	Standard (+/- 20%)
L	Low Variation (+/- 7%)

Highlight represents Global Core product. More detailed information is available in the Global Core Catalog, MSG15-3504, available online at www.parker.com/hvs/resources

Proportional Valves

DIRECTIONAL CONTROL VALVES (GP025* series)

(For more information, see details page [linked here](#))


GP

Directional
Control /
4W/3P

02

Size

Spool
Type

Override

Seal

Coil(s) sold separately.
Please see section CE
for more information.

Model	Super Coil
GP025*	CC (1/2")

Size	
Code	Cavity Size
02	C08-4 (5000 PSI) ¹
¹ - Max Tank (port 1) pressure 3000 PSI	

Override	
Code	Option
Omit	None
1	Non-Detented
2	Detented

Seal	
Code	Material
N	Nitrile
V	Fluorocarbon

Highlight represents Global Core product. More detailed information is available in the Global Core Catalog, MSG15-3504, available online at www.parker.com/hvs/resources

Spool Function					
Code	Rated Flow		Super Coil Type		Function
	“A” Solenoid Push (3-2, 4-1)	“B” Solenoid Pull (3-4, 2-1)	Push	Pull	
51L (Low Flow)	1.4 GPM	1.4 GPM	CCP (High Watt)	CCP (High Watt)	
	0.9 GPM	0.9 GPM	CCS (Low Watt)	CCS (Low Watt)	
51 (Standard)	3.5 GPM	4.5 GPM	CCP (High Watt)	CCP (High Watt)	
	3.0 GPM	4.0 GPM	CCS (Low Watt)	CCS (Low Watt)	
52 (High Flow)	5.5 GPM	4.5 GPM	CCP (High Watt)	CCP (High Watt)	
	4.5 GPM	3.5 GPM	CCS (Low Watt)	CCS (Low Watt)	
53L (Low Flow)	1.4 GPM	1.4 GPM	CCP (High Watt)	CCP (High Watt)	
	1.0 GPM	1.0 GPM	CCS (Low Watt)	CCS (Low Watt)	
53 (Standard)	3.8 GPM	4.0 GPM	CCP (High Watt)	CCP (High Watt)	
	2.5 GPM	2.7 GPM	CCS (Low Watt)	CCS (Low Watt)	
54 (High Flow)	4.5 GPM	5.0 GPM	CCP (High Watt)	CCP (High Watt)	
	4.0 GPM	4.0 GPM	CCS (Low Watt)	CCS (Low Watt)	

Proportional Valves

DIRECTIONAL CONTROL VALVES (*DSP105 series*)

**DSP**

Directional
Control /
4W/3P

105

Size



Spool
Function



Override



Seal

(For more information, see
details page [linked here](#))

Coil(s) sold separately.
Please see section CE
for more information.

Model	Super Coil
DSP105	CA (5/8")

Size	
Code	Cavity Size
10	C10-4 (8.5 GPM, 5000 PSI)
1 - Max Tank (port 1) pressure 3000 PSI	

Highlight represents Global Core
product More detailed information is
available in the Global Core Catalog,
MSG15-3504, available online at
www.parker.com/hvs/resources

Spool Function	
Code	Function
C1	
C4	

Override	
Code	Option
Omit	None
M	Push/Pull

Seal	
Code	Material
Omit	"D"-Ring
N	Nitrile
V	Fluorocarbon

SUPER COIL, 1/2" and 5/8" (CC* and CA* series)

(For more information, see details page linked here:
[CC Series](#) [CA Series](#))



Super
Coil /
Size



Wattage



Voltage



Termination

Voltage	
Code	Voltage
012	12 VDC
024	24 VDC
115	115 VAC

Size	
Code	I.D. Size
CC	1/2"
CA	5/8"

Wattage			
Code	Wattage	Watt (DC coil)	Watt (AC coil)
S	Standard	14w (CC)	16w (CC)
		18w (CA)	18w (CA)
P	Puissant	19w (CC)	19w (CC)
		28w (CA)	28w (CA)

Termination	
Code	Termination
D ³	DIN 43650
H ¹	Integral Deutsch
HSN ¹	Integral Deutsch w/Anti-Vibration ring
HSZN ¹	Integral Deutsch w/Anti-Vibration ring and Zener Diode
L ¹	Double Lead Wire
S ¹	Double Spade
C ²	Double Lead Wire with Conduit Connector

Highlight represents Global Core product. More detailed information is available in the Global Core Catalog, MSG15-3504, available online at www.parker.com/hvs/resources

1 - 012 or 024 voltage (DC) only.
2 - 115 voltage (AC) only.
3 - Supplied without connector

SHORT COIL, 1/2" (SW7L* series for EPR083R)

(For more information, see details page [linked here](#))


SW7

Super
Coil /
Size

L

Wattage

Termination

Voltage

Highlight represents Global Core product. More detailed information is available in the Global Core Catalog, MSG15-3504, available online at www.parker.com/hvs/resources

Size	
Code	I.D. Size
SW7L	1/2" Short

Wattage	
Code	Wattage
L	Standard - 14w

Termination	
Code	Termination
H	Integral Deutsch
W	Double Lead Wire

Voltage	
Code	Voltage
012	12 VDC
024	24 VDC

DS COIL, 1" (851* series)

(For more information, see details page [linked here](#))


851

DS Coil
/ Size

Termination
/ Wattage

Voltage

Size	
Code	I.D. Size
851	1"

Termination		Wattage
Code	Termination	
060 ¹	Double Spade	42w
062 ¹	Double Lead	42w
057 ²	Double Lead w/Conduit	55w
058 ³	DIN 43650	42w (DC) 55w (AC)



1 - 012VDC or 024VDC voltage (DC) only.
2 - 120VAC voltage (AC) only.
3 - Supplied without connector

Voltage
Code
012VDC
024VDC
120VAC

Bodies

STANDARD LINE BODIES (*B**-* series*)

(For more information, see details page [linked here](#))

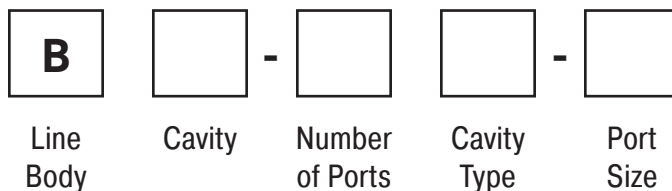

Cavity	
Code	Cavity
04	C04
08	C08
10	C10
12	C12
16	C16
20	C20

Number of Ports	
Code	
2	
3	
4 ¹	

1 - Not available with cavity 04 and 20.

Cavity Type	
Code	Type
Omit	Standard
F ¹	FPS
L ²	Long
S ³	Short


1 - Cavity 12, 2 ports, for FAP121 series valve only.
2 - Cavity 12, 4 ports, for DSH125 series valve only.
3 - Cavity 10, 16, and 20, 3 ports, for Logic Element series valves only.

Port Size	
Code	Size
4T	SAE-4 (Steel) - Cavity 04 only
6T	SAE-6 (Steel) - Cavity 08 only
8T	SAE-8 (Steel) - Cavity 10 only
12T	SAE-12 (Steel) - Cavity 12 only
16T	SAE-16 (Steel) - Cavity 16 only
20T	SAE-20 (Steel) - Cavity 20 only

Highlight represents Global Core product. More detailed information is available in the Global Core Catalog, MSG15-3504, available online at www.parker.com/hvs/resources

COUNTERBALANCE BODIES (*MHC-* series*)

(For more information, see details page [linked here](#))

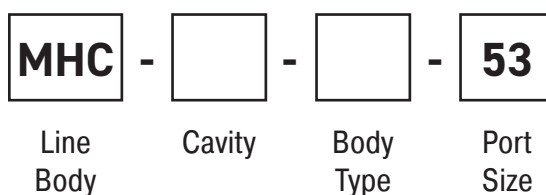

Cavity	
Code	Cavity
010	CDD-1010
022	CDD-1036


Body Type	
Code	Type
A	Single
D	Double

Port Size	
Code	Size
53	SAE-10 through port SAE-6 pilot port

Highlight represents Global Core product. More detailed information is available in the Global Core Catalog, MSG15-3504, available online at www.parker.com/hvs/resources

SPECIAL LINE BODIES (*LB10* series*)

(For more information, see details page [linked here](#))


LB10

Line
Body



Cavity /
Ports

S

Material
(Steel)

Highlight represents Global Core product. More detailed information is available in the Global Core Catalog, MSG15-3504, available online at www.parker.com/hvs/resources

Cavity				Cavity			
Code	Cavity	Number Ports	Port Size	Code	Cavity	Number Ports	Port Size
066	3A	3	SAE-16	318	53-1	3	SAE-8 (main) SAE-4 (aux)
069	3C	3	SAE-16 (main) SAE-4 (aux)	321	5A	5	SAE-12 (main) SAE-4 (aux)
078	3M	3	SAE-16 (main) SAE-4 (aux)	436	ES10436	2	SAE-6
089	3K	3	SAE-16 (main) SAE-4 (aux)	543	2R	2	SAE-8
105	3M	3	SAE-16 (Dual Cavity)	553	3X	3	SAE-8
212	2C	2	SAE-16	562	4C	4	SAE-8
220	2U	2	SAE-16	591	54-1	3	SAE-4
234	3C	3	SAE-12 (Dual Cavity)	795	CAV0W-2	2	SAE-4
253	68-1	3	SAE-20 (main) SAE-6 (aux)	815	CAVSW-3	3	SAE-4
317	100-1	5	SAE-20 (main) SAE-6 (aux)	825	CAVT11A	3	SAE-8 (main) SAE-4 (aux)

CARTPAK BODIES (*BD03* series*)

(For more information, see details page [linked here](#))



BD03 - - **S**

Cartpak
Body

Function
/ Cavity

Material
(Steel)

Function / Cavity					Function / Cavity				
Code	Function	Schematic	Cavity	Mounting Size	Code	Function	Schematic	Cavity	Mounting Size
ABN	A and B Port Interrupt		C10-2 (Dual Cavity)	D03	PN	P Port Interrupt		C10-2 (Single Cavity)	D03
ABT	A and B Ports to Tank		C10-2 (Dual Cavity)	D03	PN2	P Port Interrupt		C10-2 (Single Cavity)	D03
ABX	A and B Crossover		C10-2 (Dual Cavity)	D03	PNR	P Port Interrupt, Reducing		C10-3 (Single Cavity)	D03
ADB	A Port Drain to B		C10-3 (Single Cavity)	D03	PNS	P Port Interrupt, Sequence		C10-3 (Single Cavity)	D03
BDA	B Port Drain to A		C10-3 (Single Cavity)	D03	POC	Dual P.O. Check		C10-2 (Dual Cavity)	D03
DDX	A and B Ports Drain to Crossover		C10-3 (Dual Cavity)	D03	PT	P to T		C10-2 (Single Cavity)	D03



Parker Hannifin Corporation
Hydraulic Valve Systems Division
520 Ternes Avenue
Elyria, Oh. 44036-4026
phone 440 366 5100
email HCS.Support@support.parker.com
www.parker.com/hvs

© 2025 Parker Hannifin Corporation

